


How to configure the TS43H for a specific profile

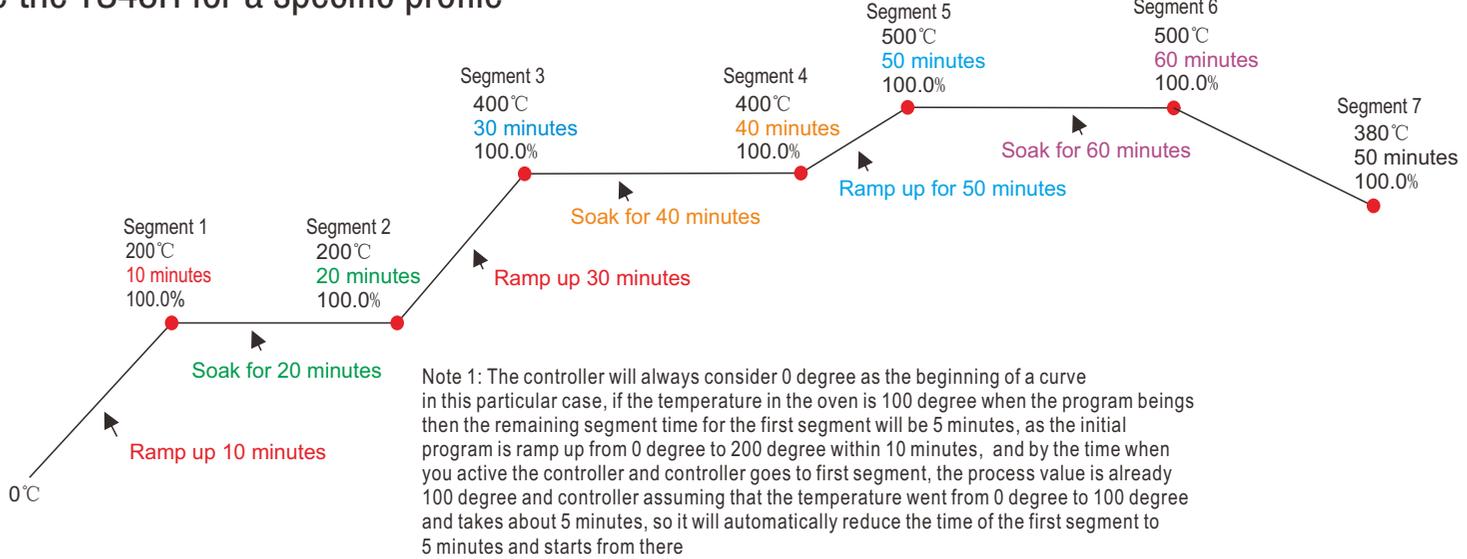

Segment	Segment 1	Segment 2	Segment 3	Segment 4	Segment 5	Segment 6
°C	200	200	400	400	500	500
Minute	10	20	30	40	50	60
Power	100%	100%	100%	100%	100%	100%
Segment	Segment 7	Segment 8	Segment 9	Segment 10	Segment 11	Segment 12
°C	380	0	0	0	0	0
Minute	50	0	0	0	0	0
Power	100%	0%	0%	0%	0%	0%

Note 2: Maximum power restrictions will be used to constrain the maximum power of each segment also can be used to end a program, the factory default is 100%, if you have a profile with 6 segments, then you can set the power as 0% at segment 7, which means that the program will end after segment 6. if you set power as 80% on segment 4, then it means the maximum output power will be 80% on segment 4, please be careful when setting the power restrictions to avoid insufficient on the heating.